


From presentation rooms to concert halls, schools to stadiums, churches to corporate offices, iSoundhub Column Speakers deliver high speech intelligibility and natural sounding music in a wide range of applications through its 2 Fullrange Speaker Driver and 1 Horn Driver.

With its vertical column of 3 drivers providing control over a horizontal and vertical pattern of 180° x 30°, the speaker reproduces the critical vocal range 80Hz - 15kHz with a sophisticated cardioid design.

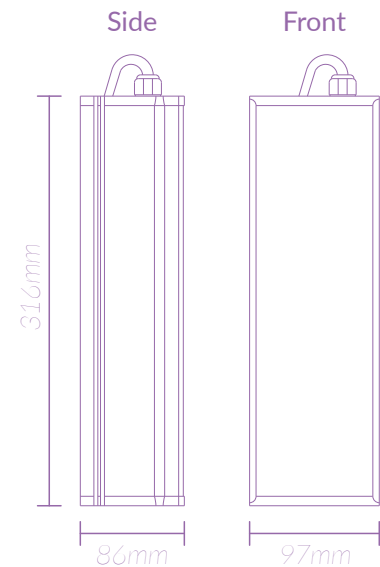

Main Features

- **Controlled Sound Projection** - A sound projection system within a building or large room which attempts to direct the sound at an intended focal point, or within a small zone, with minimal reverberation.
- **Aluminum Casing** - This allows iSoundhub speakers to resist damages better as well as provide a sleek, sleek look that sets it apart from other brands.
- **Line Array Speaker Design** - This speaker design provides a broader sound dispersion than most speakers on the market, allowing it to provide better sound quality in any place.

Technical Specifications

iSoundhub Column Speaker	
Description	Public Address System Outdoor Column Speaker
Rated Power Input	10W / 20W
Speaker	2 x 3" Fullrange Speaker Driver 1 x 1" Horn Driver
Line Input	100V to 70V
Frequency Response	80Hz to 15kHz
SPL (@1W/m)	(1W/m) 89dB
IP Rating	IP 66
Dimension (WxHxD)	97 x 316 x 86 mm
Material	Aluminium alloy enclosure
Net Weight	2.1 kg

Frequency Response

